



Your efficient 3-in-1 mono laser multifunction printer

Easy to set up and connect with fast
flawless printing

DCP-L2660DW



PRINT



SCAN



COPY



WIRELESS

www.brother.co.uk

Your efficient 3-in-1 mono laser printer

Work smarter from anywhere at home or in the office with the easily connected DCP-L2660DW. Hosting a range of efficiency-boosting features, this 3-in-1 mono laser printer saves you time with fast flawless printing and quick scan speeds, automatic 2-sided print, a generous paper tray capacity and large automatic document feeder (ADF).

Get set up with ease and download the Brother Mobile Connect app, enabling you to print and scan from virtually anywhere.

DCP-L2660DW



Key features:

- Print up to 34 pages per minute (ppm)
- 2-sided print, up to 16 sides per minute (spm)
- Scan up to 22.5 images per minute³
- 6.8cm colour touchscreen
- Fast ethernet, 5GHz Wi-Fi and USB
- 256MB internal memory
- 50 sheet ADF¹¹
- 250 sheet paper input tray¹¹
- Comes with 1,200 page yield toner.
3,000 maximum yield available⁷

Work smarter

The DCP-L2660DW is designed to increase efficiency, with fast print speeds helping you to work smarter. The ADF and 2-sided print feature save you time, allowing you to get on with other tasks. Scan your documents in colour or mono and send directly to your desktop or mobile device.

Effortless

Make your day easier and your printing effortless, with simple set up and fast ethernet, 5GHz Wi-Fi or USB connection. This efficient DCP-L2660DW is a breeze to operate using the easy to navigate menu on the 6.8cm colour touchscreen. Benefit from the ability to create custom shortcuts on the touchscreen for your most used functions.

The perfect partner

High quality print technology ensures that your output is flawless and professional every time. The expertly designed DCP-L2660DW has high capacity paper input and output trays allowing you to print for longer, while the compact and quiet form enables you to work without interruption in smaller workspaces.

Print longer

The DCP-L2660DW keeps your printing costs down using a separate drum and 1,200 page toner, supporting your higher print volume needs. Toner is easy to change and high yield toner is available, printing up to 3,000 pages⁷, reducing your cost per page and frequency to replace.

Secure by design

To keep pace with the ever-evolving legislation on privacy and data security, our devices offer the latest industry-standard security features to securely protect your data. Our security experts continuously research new enhancements to products, solutions and services to proactively ensure all our products are 'secure by design'.

The DCP-L2660DW provides a range of robust features. It uses triple-layer security at a device, network and document level. This offers added peace of mind and guarantees that the integrity of your data is maintained at every step.

Print from anywhere

With Brother Mobile Connect, you can fully operate your Brother printer from your fingertips. Print and scan documents on the move and order genuine Brother supplies straight to your door. You can also personalise your frequently used features and unlock a revolutionary way of printing from your mobile device.


Download the app on your mobile device to get started.



The automated toner subscription for your printer

Whether you print a little or a lot, we have a flexible printing subscription plan to suit everyone. You can sign up and enjoy toner supplies delivered automatically with free postage direct to your doorstep.

Benefit from ongoing printer warranty cover, free toner recycling and first-class customer support. Subscribe to a better way to print.

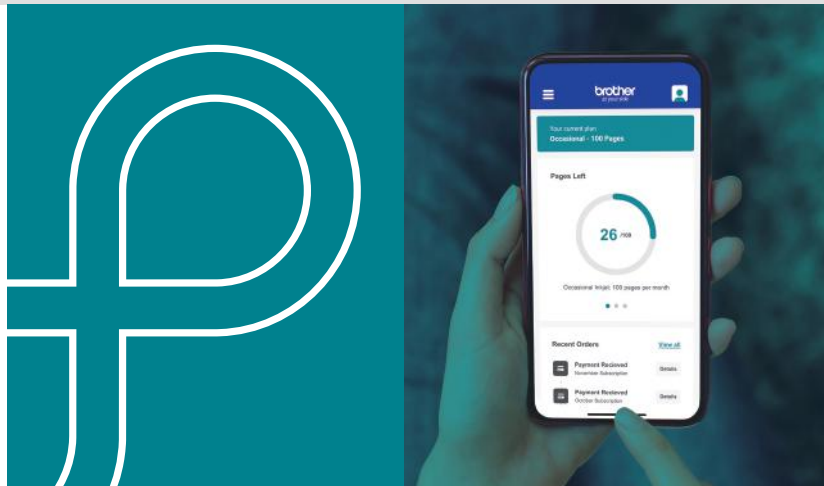

TO FIND OUT MORE

Download the Brother Mobile Connect app or visit the website: brother.co.uk/ecopro



General	Technology Electrophotographic laser	Local interface Hi-Speed USB 2.0	Wireless network 2.4GHz and 5GHz support
	Memory 256MB	Wired network Fast ethernet	Carton contents Device, in-box toner, drum, power supply cord, quick set-up guide, warranty card
	Control panel 6.8cm colour touchscreen LCD		
Print	Print speed (A4) 1-sided: 34ppm mono 2-sided: 16spm mono	Resolution Up to 1200 x 1200dpi	Embedded barcodes (PCL) 16 bar codes* *Code39, Interleaved 2 of 5, FIM (US-PostNet), Post Net (US-PostNet), EAN-8, EAN-13, UPC-A, UPC-E, Codabar, ISBN EAN), ISBN UPC-E), Code128 (set A, set B, set C), EAN128 (set A, set B, set C), Code93, GS1Databar, MSI
	First print out time (FPOT) Up to 8.5 seconds mono	Print languages PCL6, BR-Script3, PDF Version 1.7	
	Quiet mode A mode to reduce the printing noise	Embedded fonts (PCL) 73 scalable fonts, 12 bitmap fonts	Embedded fonts (Postscript) 66 scalable fonts
Printer functions	N-up printing Reduce up to 25 pages into a single page	Print profiles Store your favourite driver settings as profiles to easily recall them	Print complete notice A printing notification can be set to go to your computer (network only)
	Poster printing Enlarge a single page into a poster using 2x2, 3x3, 4x4 or 5x5 pages	Manual 2-sided print Manual 2-sided printing (recommended for media not supported by automatic 2-sided print)	
	Toner save mode Use the toner save mode to reduce toner consumption without affecting print speed	Reverse print Rotate the content of a printed document by 180°	
	Watermark printing Watermark your documents with predefined text, custom logo or custom messages		
	ID printing Add identification to your printed documents (date and time, short custom message or PC username)		
	Booklet printing Print documents in A5 booklet format using automatic or manual 2-sided print		

Printer driver

Windows

Windows 10 (32 and 64 bit)
Windows 11(64 bit)
and more

macOS

Printing via macOS requires the use of AirPrint. Mac drivers are not provided.

Linux

CUPS, LPD/LPRng
(x86/x64 environment)

ChromeOS

Supports native
ChromeOS printing

PCL driver

Universal printer driver
(Windows)
(PCL5e/BRScript)

PostScript Universal printer driver

Driver for Windows that enables you to print to any network or locally connected Brother printer

Visit support.brother.com for the full list of supported OS and to download the latest drivers and software.

Paper handling¹¹

Paper input:
Standard tray

250 sheets

Manual feed slot

1 sheet

ADF

50 sheets

Paper output

120 sheets A4

Envelope printing

Yes, from manual feed slot

Media sizes:
Standard tray

A4, Letter, B5(JIS), B5(ISO),
A5, A5(Long Edge), B6(JIS),
A6, Executive, A4 Short,
16K(195x270mm)

Manual feed slot

Width: 76.2 to 215.9 mm,
Length: 127 to 355.6 mm
Envelope: COM-10, DL, C5,
Monarch

ADF

Width: 105 to 216 mm
Length: 147 to 356 mm

Scanner glass

Up to A4/LTR

Auto 2-sided

A4

Media type and weights:
Standard tray

Plain paper, thin paper,
recycled paper, thick paper
60-163gsm

Manual feed slot

Plain paper, thin paper, thick
paper, thicker paper, recycled
paper, bond, label, envelope,
env. thin, env. thick
60-230gsm

ADF

Plain paper, recycled paper
60 to 105gsm

Auto 2-sided

Plain paper, thin paper,
recycled paper
60-105gsm

Mobile and Web connectivity

Brother Mobile Connect¹⁷
(Android)

Print from, scan to, preview
copies and check the machine
status from an Android device

Brother Mobile Connect¹⁷
(iPad / iPhone)

Print from, scan to, preview
copies and check the machine
status from an iPad / iPhone

Apple AirPrint¹⁷

Print from and scan to most
common file types from any
AirPrint enabled application

Brother Print Service
Plugin¹⁷

Print from an Android device
without a dedicated App.

Mopria™ ¹⁷

Print most common file types
from Mopria™ supported
Android devices

Brother Apps¹⁸

Scan to Mobile, Scan to
Searchable PDF, Scan to
PowerPoint, Scan to Excel, Scan
to Word, Easy scan to E-mail,
Cloud Secure Print, Email Print

Web Connect¹⁸

Print from and scan to without
using a PC on Box, Dropbox,
Evernote, OneDrive, Google
Drive™ OneNote, SharePoint
online

Copy

Copy speed (A4)

1-sided: 34 copies per minute mono

Resolution

Up to 600 x 600dpi

First copy out time (FCOT)

Up to 10 seconds mono

Greyscale

256 shades of grey
(8 bit for each colour)

Copy functions

Multi-copying/stack/sort

Makes up to 99 copies of each page/stacks or sorts

Enlargement/reduction ratio

Reduce or increase document sizes from 25% to 400% in 1% increments

2 in 1 ID copying

Allows the user to copy both sides of an ID card to a single A4 sheet

N in 1 copying

Allows the user to compress 2 or 4 pages on to a single A4 sheet

Scan

Scanner type

Contact image sensor (CIS)

Colour and mono scanning

Yes

Scan speed (A4)³

1-sided: 22.5ipm mono and 7.5ipm colour

Scan resolution from ADF

600 x 600dpi

Scan resolution from scanner glass

1200 x 1200dpi

Interpolated scan resolution

Brother Scanner Utility enhances up to 19,200 x 19,200dpi

Colour depth

30 bit colour processing (input)
24 bit colour processing (output)

Greyscale

10 bit colour processing (input)
8 bit colour processing (output)

Scanner functions

Supported file formats

Including PDF (PDF/A, Secure PDF, Signed PDF, Searchable¹⁷)
JPEG, TIFF

Standard functions¹⁷

Scan to e-mail, OCR ,
image, file

Network scanning¹⁶

Scan to FTP, FTPS, HTTPS,
Sharepoint server (iPrint&Scan for Windows only)

Scan features

Auto deskew from ADF only
(iPrint&Scan for desktop)

Scan to Microsoft Office

Scan to Word (.docx),
PowerPoint (.pptx), Excel (.xlsx)
for Microsoft Office

Scan profile¹⁵

Create up to 25 profiles for an easy way to store multiple scan settings (scan to FTP/Sharepoint)

Document separation

Create scanned files based on blank sheet separation or a specific number of single sided images or sheets of paper, even if more documents are set on the ADF

Scanner drivers	Windows TWAIN and WIA Windows 10 (32 bit) Windows 11 (32 and 64 bit)	macOS Scanning via macOS requires the use of AirPrint. Mac drivers are not provided.	Linux SANE (32 and 64 bit editions) ChromeOS Supports native ChromeOS scanning
------------------------	--	--	---

Visit support.brother.com for the full list of supported OS and to download the latest drivers and software.

Fleet management tools	BRAdmin^{16,17} LAN/WAN management software	Embedded web server Web based print management software embedded onto the device Driver Deployment Wizard^{16,17} Easily create print drivers for hassle free deployment over your network	Status monitor¹⁶ Monitor the status of your machine from your computer
-------------------------------	---	---	---

Software	Brother iPrint&Scan Desktop^{15,17} Print from, scan to, preview copies and check the machine status from Windows or macOS PC	PaperPort SE 14^{16,17} Document management and sharing program from KOFAX Utilities Provides setup guides, manual, FAQ, troubleshooting and contact to Brother customer service	Easy setup Simple access to drivers and software for the installation of your Brother machine from support.brother.com
-----------------	---	---	--

Connectivity	Wired network Fast ethernet (10Base-T/100Base-TX) Wireless network 2.4GHz: IEEE 802.11 b/g/n (Infrastructure Mode) IEEE 802.11 g/n (Wi-Fi Direct) 5GHz: IEEE 802.11 a/n (Infrastructure Mode) IEEE 802.11 a/n (Wi-Fi Direct)	Wi-Fi Direct® Print wirelessly without having to go through a wireless access point (both automatic and manual methods supported) Wireless setup support Wi-Fi Protected Setup (WPS) Wireless applications Vertical pairing	Mobile Print or scan from your mobile device with Brother Mobile Connect, Airprint, Mopria Local interface Hi-Speed USB 2.0
---------------------	--	---	--

Security features

Wired network security

SMTP-AUTH, SSL/TLS(SMTP, HTTP, IPP, FTP), SNMP v3, 802.1x (EAP-MD5, EAP-FAST, PEAP, EAP-TLS, EAP-TTLS), OAuth(SMTP, POP3, IMAP4)

Wireless network security

WEP 64/128 bit, WPA-PSK(TKIP/AES), WPA2-PSK(TKIP/AES), WPA3-SAE (AES), WiFi Direct supports WPA2-PSK(AES) only.

SMTP-AUTH, SSL/TLS (SMTP,HTTP,IPP,FTP), SNMP v3, 802.1x (EAP-FAST, PEAP, EAP-TLS, EAP-TTLS), OAuth(SMTP, POP3, IMAP4)

IPv4

ARP, RARP, BOOTP, DHCP, APIPA(Auto IP), WINS/NetBIOS name resolution, DNS Resolver, mDNS, LLNMR responder, LPR/LPD, Custom Raw Port/Port9100, SMTP Client, IPP/PPS, FTP Client and Server, SNMPv1/v2c/v3, HTTP/HTTPS server, TFTP client and server, ICMP, Web Services (Print/Scan), SNTTP Client

IPv6

NDP, RA, DNS resolver, mDNS, LLNMR responder, LPR/LPD, Custom Raw Port/Port9100, IPP/PPS, SMTP Client, FTP Client and Server, SNMPv1/v2c/v3, HTTP/HTTPS server, TFTP client and server, ICMPv6, Web Services (Print/Scan), SNTTP Client

IP filter

Restrict which network users can or cannot access the device over the network (IPv4 only)

E-mail notifications

Automatically have the device send e-mail alerts when it requires attention, such as when the toner is low or needs replacing

E-mail reports

Receive usage reports on a regular basis via e-mail

Automatic intrusion detection

All Brother Print devices are secure by design. Devices automatically recognise security attacks and take preventative measures, including rebooting where necessary, to ensure the device remains secure

Firmware updates

In addition to allowing automatic update alerts to install the latest version the printer can be set to not receive older firmware versions to avoid downgrade by an unauthorised user

Cloud secure print

Enables password protected driverless print job release

Certificate management

Use the default standard self-signed, create a custom self-signed certificate, certificate signing request (CSR), or external public certificate and private key for protected network

Digitally-signed firmware

The firmware for Brother print and scan devices is digitally signed and secure

Port-based network access control

(IEEE 802.1x)

Brother devices are in full compliance with this standard, to allow connection to an 802.1x EAP (Extensible Authentication Protocol) protected network

Restrict network protocols

The Protocol Control feature allows an administrator to restrict communication protocols (e.g. FTP, Telnet) as required

Supplies and consumables	In-box toner⁷ 1 x 1,200 pages (BK)	High yield toner⁷ TN2510XL - 3,000 pages	Drum unit DR2510 - approx 15,000 pages at 1 pages per job
	Standard yield toner⁷ TN2510 - 1,200 pages		
Dimensions and weights	With carton (WxDxH) 580 x 517 x 434mm -13.90kg	Without carton (WxDxH) 410 x 399 x 319mm - 11.4kg	
Duty cycle	Recommended monthly Up to 2,500 pages		
Operating environment	Power requirement 220-240V AC 50/60Hz	Operating environment Humidity 20 - 80 % 10°C - 32.5°C 50°F - 90.5°F	Storage environment Humidity 35 - 85 % 0°C - 40°C 32°F - 104°F
Environment	Approx power consumption^{13,23} Copying: 490W Copying in quiet mode: 280W Printing: 470W Printing in quiet mode: 270W Ready: 43W Sleep: 4.1W Deep sleep: 0.7W Power Off: 0.10W TEC value 0.39 kWh/week	Sound power¹² Printing: 6.63B(A) Ready: Inaudible Quiet mode: 6.12B(A) Deep sleep: Inaudible Sound pressure¹² PC printing (mono): Approx. 49.0dB(A) Ready: 30.0dB(A) Quiet mode: 44.0dBA) Toner save This reduces the toner consumption to get more pages from your consumables	Blue Angel Yes GS Mark Yes Nordic Swan Yes

DCP-L2660DW | Page 9

- 3 Scan Speeds based on ISO/IEC 17991
- 7 Approx. declared yield value in accordance with ISO/IEC 19752
- 11 Capacity calculated with 80gsm paper
- 12 Sound pressure and sound power level in accordance with ISO 7779
- 13 Power consumption power off is measured according to IEC 62301 Edition 2.0
- 15 Windows and macOS only
- 16 Windows only
- 17 Optional download
- 18 Requires an Internet connection
- 23 Power consumption is measured using ENERGY STAR Ver 3.1 test method network configuration



Working with you for a better environment

At Brother, our green initiative is simple. We strive to take responsibility, act respectfully and try to make a positive difference to help build a society where sustainable development can be achieved. We call this approach Brother Earth.

www.brotherearth.com

All specifications correct at the time of printing and are subject to change. Brother is a registered trademark of Brother Industries Ltd. Brand product names are registered trademarks or trademarks of their respective companies.

CD4208

brother
at your side