



All in Box print bundle 3-in-1 mono laser multifunction printer

Easy to set up and connect with fast
flawless printing

DCP-L2627DWXL



PRINT



SCAN



COPY



WIRELESS

www.brother.co.uk

Your efficient 3-in-1 mono laser printer

Benefit from 6,000 in-box toner prints and a three year peace of mind guarantee with the all in box print bundle.

Work smarter from anywhere at home or in the office with the easily connected DCP-L2627DWXL. Hosting a range of efficiency-boosting features, this 3-in-1 mono laser printer saves you time with fast flawless printing and quick scan speeds, automatic 2-sided print and a generous paper tray capacity

Get set up with ease and download the Brother Mobile Connect app, enabling you to print and scan from virtually anywhere.

DCP-L2627DWXL



Key features:

- Print up to 32 pages per minute (ppm)
- 2-sided print, up to 16 sides per minute (spm)
- 2 line LCD control panel
- 5GHz Wi-Fi and USB
- 128MB internal memory
- 250 sheet paper input tray¹¹
- Bundled with 2 x 3,000 page yield toners.
- 3 years peace of mind guarantee

All in Box print bundle

When you purchase this high quality all-in-one mono laser printer, you will also receive two in-box toners providing 6,000 prints⁷, plus a 3-year peace of mind guarantee. The cost per page savings makes this All in Box device a great choice for home or office printing.

Work smarter

The DCP-L2627DWXL is designed to increase efficiency, with fast print speeds helping you to work smarter. The 2-sided print feature saves you time, enabling you to get on with other tasks. Scan your documents in colour or mono and send directly to your desktop or mobile device.

Effortless

Make your day easier and your printing effortless, with simple set up and 5GHz Wi-Fi or USB connection. This efficient DCP-L2627DWXL is a breeze to operate using the easy to navigate control panel.

The perfect partner

High quality print technology ensures that your output is flawless and professional every time. The expertly designed DCP-L2627DWXL has high capacity paper input and output trays allowing you to print for longer, while the compact and quiet form enables you to work without interruption in smaller workspaces.

Secure by design

To keep pace with the ever-evolving legislation on privacy and data security, our devices offer the latest industry-standard security features to securely protect your data. Our security experts continuously research new enhancements to products, solutions and services to proactively ensure all our products are 'secure by design'.

The DCP-L2627DWXL provides a range of robust features. It uses triple-layer security at a device, network and document level. This offers added peace of mind and guarantees that the integrity of your data is maintained at every step.

Print from anywhere

With Brother Mobile Connect, you can fully operate your Brother printer from your fingertips. Print and scan documents on the move and order genuine Brother supplies straight to your door. You can also personalise your frequently used features and unlock a revolutionary way of printing from your mobile device.


Download the app on your mobile device to get started.



The automated toner subscription for your printer

Whether you print a little or a lot, we have a flexible printing subscription plan to suit everyone. You can sign up and enjoy toner supplies delivered automatically with free postage direct to your doorstep.

Benefit from ongoing printer warranty cover, free toner recycling and first-class customer support. Subscribe to a better way to print.

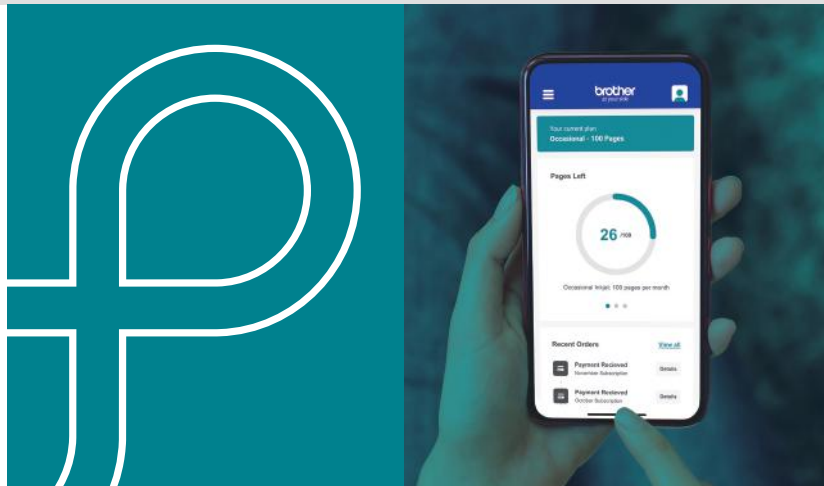

TO FIND OUT MORE

Download the Brother Mobile Connect app or visit the website: brother.co.uk/ecopro



General	Technology Electrophotographic laser	Local interface Hi-Speed USB 2.0	Wireless network 2.4GHz and 5GHz support
	Memory 128MB		Carton contents Device, in-box toner, drum, power supply cord, quick set-up guide, warranty card
	Control panel 2 line LCD with keys		
Print	Print speed (A4) 1-sided: 32ppm mono 2-sided: 16spm mono	Quiet mode A mode to reduce the printing noise	Resolution Up to 1200 x 1200dpi
	First print out time (FPOT) Up to 8.5 seconds mono		
Printer functions	N-up printing Reduce up to 25 pages into a single page	Print profiles Store your favourite driver settings as profiles to easily recall them	Print complete notice A printing notification can be set to go to your computer (network only)
	Poster printing Enlarge a single page into a poster using 2x2, 3x3, 4x4 or 5x5 pages	Manual 2-sided print Manual 2-sided printing (recommended for media not supported by automatic 2-sided print)	
	Toner save mode Use the toner save mode to reduce toner consumption without affecting print speed	Reverse print Rotate the content of a printed document by 180°	
	Watermark printing Watermark your documents with predefined text, custom logo or custom messages		
	ID printing Add identification to your printed documents (date and time, short custom message or PC username)		
	Booklet printing Print documents in A5 booklet format using automatic or manual 2-sided print		

Printer driver	Windows Windows 10 (32 and 64 bit) Windows 11 (64 bit) and more	Linux CUPS, LPD/LPRng (x86/x64 environment)	ChromeOS Supports native ChromeOS printing
	macOS Printing via macOS requires the use of AirPrint. Mac drivers are not provided.		

Visit support.brother.com for the full list of supported OS and to download the latest drivers and software.

Paper handling¹¹

Paper input: Standard tray 250 sheets Manual feed slot 1 sheet Paper output 120 sheets A4 Envelope printing Yes, from manual feed slot	Media sizes: Standard tray A4, Letter, B5(JIS), B5(ISO), A5, A5(Long Edge), B6(JIS), A6, Executive, A4 Short, 16K(195x270mm) Manual feed slot Width: 76.2 to 215.9 mm, Length: 127 to 355.6 mm Envelope: COM-10, DL, C5, Monarch Scanner glass Up to A4/LTR Auto 2-sided A4	Media type and weights: Standard tray Plain paper, thin paper, recycled paper, thick paper 60-163gsm Manual feed slot Plain paper, thin paper, thick paper, thicker paper, recycled paper, bond, label, envelope, env. thin, env. thick 60-230gsm Auto 2-sided Plain paper, thin paper, recycled paper 64-105gsm
---	---	--

Mobile and web connectivity

Brother Mobile Connect¹⁷ (Android) Print from, scan to, preview copies and check the machine status from an Android device Brother Mobile Connect¹⁷ (iPad / iPhone) Print from, scan to, preview copies and check the machine status from an iPad / iPhone	Apple AirPrint¹⁷ Print from and scan to most common file types from any AirPrint enabled application Brother Print Service Plugin¹⁷ Print from an Android devices without a dedicated app.	Mopria™ ¹⁷ Print most common file types from Mopria™ supported Android devices
---	---	---

Copy

Copy speed (A4)

1-sided: 32cpm mono

Resolution

Up to 600 x 600dpi

First copy out time (FCOT)

Up to 10 seconds mono

Greyscale

256 shades of grey
(8 bit for each colour)

Copy functions

Multi-copying/stack/sort

Makes up to 99 copies of each page/stacks or sorts

Enlargement/reduction ratio

Reduce or increase document sizes from 25% to 400% in 1% increments

N in 1 copying

Allows the user to compress 2 or 4 pages on to a single A4 sheet

Scan

Scanner type

Contact image sensor (CIS)

Colour and mono scanning

Yes

Scan resolution from scanner glass

1200 x 1200dpi

Interpolated scan resolution

Brother scanner utility enhances up to 19,200 x 19,200 dpi

Colour depth

30 bit colour processing (input)
24 bit colour processing (output)

Greyscale

10 bit colour processing (Input)
8 bit colour processing (output)

Scanner functions

Supported file formats

Including PDF (PDF/A, Secure PDF, Signed PDF, Searchable¹⁷) JPEG, TIFF

Standard functions¹⁷

Scan to e-mail, OCR, image, file

Network scanning¹⁶

Scan to SharePoint
(iPrint&Scan for Windows only)

Scan to Microsoft Office

Scan to Word (.docx), PowerPoint (.pptx), Excel (.xlsx) for Microsoft Office

Scanner drivers	Windows TWAIN and WIA Windows 10 (34 and 64 bit) Windows 11 (64 bit)	macOS Scanning via macOS requires the use of AirPrint. Mac drivers are not provided.	Linux SANE (32 and 64 bit editions)
			ChromeOS Supports native ChromeOS scanning

Visit support.brother.com for the full list of supported OS and to download the latest drivers and software.

Fleet management tools	BRAdmin^{16,17} LAN/WAN management software	Embedded Web Server Web based print management software embedded onto the device	Status monitor¹⁶ Monitor the status of your machine from your computer
		Driver Deployment Wizard^{16,17} Easily create print drivers for hassle free deployment over your network	

Software	Brother iPrint&Scan Desktop^{15,17} Print from, scan to, preview copies and check the machine status from Windows or macOS PC	PaperPort SE 14^{16,17} Document management and sharing program from KOFAX	Easy setup Simple access to drivers and software for the installation of your Brother machine from support.brother.com
		Utilities Provides setup guides, manual, FAQ, troubleshooting and contact to Brother customer service	

Connectivity	Wireless network 2.4GHz: IEEE 802.11 b/g/n (Infrastructure Mode) IEEE 802.11 g/n (Wi-Fi Direct)	Wi-Fi Direct® Print wirelessly without having to go through a wireless access point (both automatic and manual methods supported)	Mobile Print or scan from your mobile device with Brother Mobile Connect, Airprint, Mopria
	5GHz: IEEE 802.11 a/n (Infrastructure Mode) IEEE 802.11 a/n (Wi-Fi Direct)	Wireless setup support Wi-Fi Protected Setup (WPS)	Local interface Hi-Speed USB 2.0
		Wireless applications Vertical pairing	

Security features

Wireless network security

WEP 64/128 bit, WPA-PSK (TKIP/AES), WPA2-PSK (TKIP/AES), WPA3-SAE (AES)

*Wi-Fi Direct supports WPA2-PSK (AES) only.

SMTP-AUTH, SSL/TLS (SMTP, HTTP, IPP, FTP), SNMP v3, 802.1x (EAP-FAST, PEAP, EAP-TLS, EAP-TTLS), OAuth(SMTP, POP3, IMAP4)

IPv4

ARP, RARP, BOOTP, DHCP, APIPA(Auto IP), WINS/NetBIOS name resolution, DNS Resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port9100, SMTP Client, IPP/PPPS, FTP Client and Server, SNMPv1/v2c/v3, HTTP/HTTPS server, TFTP client and server, ICMP, Web Services (Print/Scan), SNTP Client

IPv6

NDP, RA, DNS resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port9100, IPP/PPPS, SMTP Client, FTP Client and Server, SNMPv1/v2c/v3, HTTP/HTTPS server, TFTP client and server, ICMPv6, Web Services (Print/Scan), SNTP Client

IP filter

Restrict which network users can or cannot access the device over the network (IPv4 only)

E-mail notifications

Automatically have the device send e-mail alerts when it requires attention, such as when the toner is low or needs replacing

E-mail reports

Receive usage reports on a regular basis via e-mail

Automatic intrusion detection

All Brother print devices are secure by design. Devices automatically recognise security attacks and take preventative measures, including rebooting where necessary, to ensure the device remains secure

Firmware updates

In addition to allowing automatic update alerts to install the latest version the printer can be set to not receive older firmware versions to avoid downgrade by an unauthorised user

Cloud secure print

Enables password protected driverless print job release

Certificate management

Use the default standard self-signed, create a custom self-signed certificate, certificate signing request (CSR), or external public certificate and private key for protected network

Digitally-signed firmware

The firmware for Brother print and scan devices is digitally signed and secure

Port-based network access control

(IEEE 802.1x)

Brother devices are in full compliance with this standard, to allow connection to an 802.1x EAP (Extensible Authentication Protocol) protected network

Restrict network protocols

The Protocol Control feature allows an administrator to restrict communication protocols (e.g. FTP, Telnet) as required

Supplies and consumables

In-box toner⁷

2 x 3,000 pages (BK)

High yield toner⁷

TN2510XL - 3,000 pages

Drum unit

DR2510 - approx 15,000 pages
at 1 page per job

Dimensions and weights

With carton (WxDxH)

580 x 517 x 434mm - 13.70kg

Without carton (WxDxH)

410 x 399 x 272mm - 11.20kg

Duty cycle

Recommended monthly

Up to 2,500 pages

Operating environment

Power requirement

220-240V
AC 50/60Hz

Operating environment

Humidity 20 - 80 %
10°C - 32.5°C
50°F - 90.5°F

Storage environment

Humidity 35 - 85 %
0°C - 40°C
32°F - 104°F

Environment

Approx power consumption^{13,23}

Copying: 480W
Copying in quiet mode: 280W
Printing: 470W
Printing in quiet mode: 270W
Ready: 43W
Sleep: 4.1W
Deep sleep: 0.6W
Power Off: 0.10W

TEC value

0.39 kWh/week

Sound power¹²

Printing: 6.63B(A)
Ready: Inaudible
Quiet mode: 6.12B(A)
Deep sleep: Inaudible

Sound pressure¹²

PC printing (mono):
Approx. 49.0dB(A)
Ready: 30.0dB(A)
Quiet mode: 44.0dB(A)

Toner save

This reduces the toner consumption to get more pages from your consumables

Blue Angel

Yes

GS Mark

Yes

Nordic Swan

Yes

- 7 Approx. declared yield value in accordance with ISO/IEC 19752
- 11 Capacity calculated with 80gsm paper
- 12 Sound pressure and sound power level in accordance with ISO 7779
- 13 Power consumption power off is measured according to IEC 62301 Edition 2.0
- 15 Windows and macOS only
- 16 Windows only
- 17 Optional download
- 18 Requires an Internet connection
- 23 Power consumption is measured using ENERGY STAR Ver 3.1 test method network configuration



Working with you for a better environment

At Brother, our green initiative is simple. We strive to take responsibility, act respectfully and try to make a positive difference to help build a society where sustainable development can be achieved. We call this approach Brother Earth.

www.brotherearth.com

All specifications correct at the time of printing and are subject to change. Brother is a registered trademark of Brother Industries Ltd. Brand product names are registered trademarks or trademarks of their respective companies.

CD4208

brother
at your side