



Colourful and connected LED all-in-one printer

Fast printing with flexible connectivity

MFC-L3760CDW



PRINT



SCAN



COPY



FAX



WIRELESS

www.brother.co.uk

All-in-one colour wireless LED printer

The colourful and connected MFC-L3760CDW is expertly engineered to quietly deliver high-quality documents without compromising on speed.

A generous paper tray capacity and large automatic document feeder (ADF) allow you to multitask with ease and keep your office running smoothly.

MFC-L3760CDW



Key features:

- Print up to 26 pages per minute (ppm)
- 2-sided print, up to 10 sides per minute (spm)
- Scan up to 21 images per minute (ipm)³
- 8.8cm colour touchscreen
- Gigabit ethernet, 5GHz Wi-Fi and USB
- Print or scan directly from desktop, USB or mobile app
- 512MB internal memory
- 50 sheet Automatic document feeder (ADF)¹¹
- 250 sheet paper input tray¹¹
- Supplied with 1,000 page yield black and 1,000 page yield colour in-box toners. 2,300 page yield black and 3,000 page yield colour toners available⁸

Quiet without compromise

Print quietly without having to compromise on speed or quality. The MFC-L3760CDW prints full colour pages quickly and flawlessly whilst still being quieter than your average office conversation, making this device perfect for desktop working.

Save time

The expertly designed MFC-L3760CDW has a high capacity paper input and output tray allowing you to print without interruption. The ADF and 2-sided print feature save you time, enabling you to get on with other tasks.

Effortless

Make printing simple with the Brother MFC-L3760CDW. designed and engineered to be quieter, quicker and more efficient, this new and improved colour laser printer can be easily operated with the easy to navigate 8.8cm colour touchscreen. Benefit from custom shortcuts on the touchscreen to keep your business moving forward, quickly and efficiently.

Secure by design

To keep pace with the ever-evolving legislation on privacy and data security, our devices offer the latest industry-standard security features to securely protect your data. Our security experts continuously research new enhancements to products, solutions and services to proactively ensure all our products are 'secure by design'.

The MFC-L3760CDW provides a range of robust features. It uses triple-layer security at a device, network and document level. This offers added peace of mind and guarantees that the integrity of your data is maintained at every step.

Print from anywhere



With Brother Mobile Connect, you can fully operate your Brother printer from your fingertips. Print and scan documents on the move and order genuine Brother supplies straight to your door. You can also personalise your frequently used features and unlock a revolutionary way of printing from your mobile device.


Download the app on your mobile device to get started.



The automated toner subscription for your printer

Whether you print a little or a lot, we have a flexible printing subscription plan to suit everyone. You can sign up and enjoy toner supplies delivered automatically with free postage direct to your doorstep.

Benefit from ongoing printer warranty cover, free toner recycling and first-class customer support. Subscribe to a better way to print.

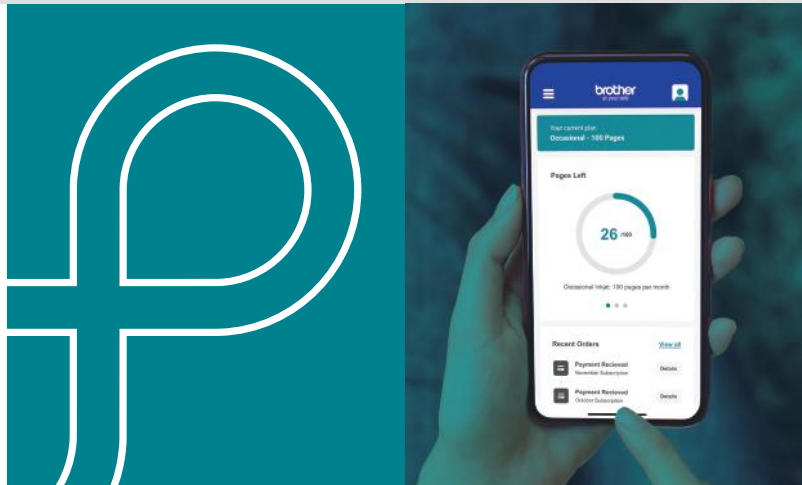

TO FIND OUT MORE

Download the Brother Mobile Connect app or visit the website: brother.co.uk/ecopro



General

Technology

Electrophotographic LED

Memory

512MB

Control panel

8.8cm colour
touchscreen LCD

Local interface

Hi-Speed USB 2.0,
USB 2.0 host (front)

Wired network

Gigabit ethernet

Wireless network

2.4GHz and 5GHz support

Carton contents

Device, in-box toners, drum unit,
belt unit, waste toner box, power
supply cord, quick
set-up guide, warranty card

Print

Print speed (A4)

1-sided: 26ppm mono/colour
2-sided: 10spm mono/colour

First print out time (FPOT)

Up to 13.5 seconds
mono/colour

Quiet mode

A mode to reduce the printing
noise

Resolution

Up to 600 x 2400dpi

Print languages

PCL5e, PCL5c, PCL6 (PCL XL
Class 3.0), BR-Script3,
PDF Version 1.7

Embedded fonts (PCL)

73 scalable fonts,
12 bitmap fonts

Embedded barcodes (PCL)

16 barcodes*

*Code39, Interleaved 2 of 5,
FIM (US-PostNet), Post Net
(US-PostNet) EAN-8, EAN-13,
UPC-A, UPC-E, Codabar, ISBN
(EAN), ISBN (UPC-E), Code128
(set A, set B, set C), EAN128
(set A, set B, set C), Code93,
GS1Databar, MSI

Embedded fonts (Postscript)

66 scalable fonts

Printer functions

N-up printing

Reduce up to 25 pages into a
single page

Poster printing

Enlarge a single page into a
poster using 2x2, 3x3, 4x4
or 5x5 pages

Toner save mode

Use the toner save mode to
reduce toner consumption
without affecting print speed

Watermark printing

Watermark your documents
with predefined text, custom
logo or custom messages

ID printing

Add identification to your printed
documents (date and time,
short custom message or
PC username)

Booklet printing

Print documents in A5 booklet
format using automatic or
manual 2-sided print

Print profiles

Store your favourite driver
settings as profiles to easily
recall them

Direct print

Print directly from a USB flash
memory drive. Supported
formats include; PDF 1.7, JPEG,
Exif+JPEG, PRN (created using
printer driver of model), TIFF
(scanned using brother model)

Manual 2-sided print

Manual 2-sided printing
(recommended for media not
supported by automatic
2-sided print)

Reverse print

Rotate the content of a
printed document by 180°

Print complete notice

A printing notification can be
set to go to your computer
(network only)

Secure print

Protect print jobs with a four
digit release code required at the
device in order for them to
be printed

Universal print (Microsoft 365)

Print effortlessly with native
Universal Print support on
Brother printers

Printer Driver

Windows

Windows 11
(32 and 64 bit) and more

macOS

Printing via macOS requires the use of AirPrint. Mac drivers are not provided.

Linux

CUPS, LPD/LPRng
(x86/x64 environment)

ChromeOS

Supports native
ChromeOS printing

PCL driver

PCL6 (standard)

Universal printer driver

Driver for Windows that enables you to print to any network or locally connected Brother printer

Visit support.brother.com for the full list of supported OS and to download the latest drivers and software.

Paper handling¹¹

Paper input: standard tray

250 sheets

Manual feed slot

1 sheet

Automatic document feeder (ADF)

50 sheets

Paper output

150 sheets A4

Envelope printing

Yes from manual feed slot

Media sizes: standard tray

A4, Letter, Legal, Mexico
Legal, India Legal, Executive,
A5, A5 Long Edge, A6, B5
(JIS), B5 (ISO), B6 (JIS), A4
Short (270mm), Folio, 16K
(195x270mm)

Manual feed slot

Width: 76.2 to 216 mm
Length: 116 to 355.6 mm
Envelope; COM-10, DL, C5,
Monarch

Automatic document feeder (ADF)

Width: 105 to 215.9 mm
Length: 147.3 to 355.6 mm

Scanner glass

Up to A4/letter

Auto 2-sided

A4

Media type and weights: standard tray

Plain paper, thin paper,
thick paper, recycled paper,
60 to 163g/m²

Manual feed slot

Plain paper, thin paper,
thick paper, recycled paper,
bond, label, envelope, env. thin,
env.thick, glossy paper,
60 to 163g/m²

Automatic document feeder (ADF)

Plain paper, thin paper, recycled
paper, 60 to 105 g/m²

Auto 2-sided

Plain paper, thin paper, recycled
paper, 60 to 105g/m²

Mobile and web connectivity

Brother Mobile Connect¹⁷ (Android)

Print from, scan to, preview
copies and check the machine
status from an Android device

Brother Mobile Connect¹⁷ (iPad / iPhone)

Print from, scan to, preview
copies and check the machine
status from an iPad / iPhone

Apple AirPrint¹⁷

Print from and scan to most
common file types from any
AirPrint enabled application

Brother Print Service Plugin¹⁷

Print from an Android device
without a dedicated App.

Mopria™ ¹⁷

Print most common file types
from Mopria™ supported
Android devices

Brother Apps¹⁸

Scan to Mobile, Scan to
Searchable PDF, Fax forward
to Cloud/E-mail, Scan to
PowerPoint, Scan to Excel, Scan
to Word, Easy scan to E-mail

Web Connect¹⁸

Print from and scan to without
using a PC on Box, Dropbox,
Evernote, OneDrive, Google
Drive™ OneNote

Copy

Copy speed (A4)

1-sided: 26 copies per minute
mono/colour

Resolution

Up to 600 x 600dpi

First copy out time (FCOT)

Up to 15.5 seconds
mono/colour

Greyscale

256 shades of grey
(8 bit for each colour)

Copy functions

Multi-copying/stack/sort

Makes up to 999 copies of each page/stacks or sorts

Enlargement/reduction ratio

Reduce or increase document sizes from 25% to 400% in 1% increments

2 in 1 ID copying

Allows the user to copy both sides of an ID card to a single A4 sheet

N in 1 copying

Allows the user to compress 2 or 4 pages on to a single A4 sheet

Scan

Scanner type

CIS (contact image sensor)

Colour and mono scanning

Yes

Scan speed (A4)³

1-sided: 27ipm mono and 21ipm colour

Scan resolution from ADF

600 x 600dpi

Scan resolution from scanner glass

1200 x 1200dpi

Interpolated scan resolution

Brother Scanner Utility enhances up to 19,200 x 19,200 dpi

Colour depth

48 bit colour processing (input)
24 bit colour processing (output)

Greyscale

16 bit colour processing (input)
8 bit colour processing (output)

Scanner functions

Supported file formats

Including PDF (PDF/A, Secure PDF, Signed PDF, Searchable¹⁷) JPEG, TIFF, XPS

Standard functions¹⁷

Scan to USB, e-mail, OCR, image and file

Network scanning

Scan to network folder (SMB)¹⁶, FTP, e-mail server, SharePoint (On Premise)

Direct scan

Scan directly to a USB flash memory storage

Scan features

Auto Deskew from ADF, Rotate Image¹⁶, Colour Drop¹⁶, Character Correction^{16,17}, Edge Emphasis¹⁶, Edge Fill^{16,17}, Skip Blank Page

Scan to Microsoft Office

Scan to Word (.docx), PowerPoint (.pptx), Excel (.xlsx) for Microsoft Office

Scan profile¹⁵

Create up to 25 preset network, FTP/Sharepoint profiles for an easy way to store multiple scan settings

Document separation

Create scanned files based on blank sheet separation or a specific number of single sided images or sheets of paper, even if more documents are set on the ADF

Scanner drivers

Windows

TWAIN and WIA
Windows 10
(32 and 64 bit editions)

macOS

Scanning via macOS requires the use of AirPrint. Mac drivers are not provided.

Linux

SANE (32 and 64 bit editions)

ChromeOS

Supports native ChromeOS scanning

Visit support.brother.com for the full list of supported OS and to download the latest drivers and software.

Fax

Fax modem

33,600bps (Super G3)

Greyscale

256 shades (8 bit) of grey are available for faxing

Out of paper reception

Up to 500 pages
(ITU-T Test Chart, Standard Resolution, JBIG)

Broadcasting

Send the same fax message up to 250 locations

Memory transmission

Up to 500 pages
(ITU-T Test Chart, Standard Resolution, JBIG)

Fax functions

Internet fax (I-Fax)

Fax documents over the internet as an email attachment

Fax to server

Scan a document and send it over the network to a separate fax server

Automatic redial

Automatic redialling if the recipient fax is busy

Telephone index

An electronic, alphabetical listing of stored speed dials and group numbers

Chain dialling

Allows the user to store parts for long dialing sequences in different speed dial locations

Batch transmission

Stores documents for the same location in the machines memory for transmission in a single call

Fax forwarding

Sends a fax received in memory to another pre-programmed fax number

Remote retrieval

Allows users to remotely access their machine and retrieve stored fax messages

Fax stamp

Add the date and time to all received faxes

Cover page

Create custom cover pages for outgoing faxes

Station ID

An ID and fax number will be printed as the header of every fax sent

PC-fax send^{15,18} and receive^{16,18}

Send and receive faxes directly from your PC. Supports mono only

Distinctive ring detection

An external service that allows two or more telephone numbers shared on a single fixed line and use different ring tones

Error correction mode (ECM)

Detect line errors during fax transmission and resend the page(s) of the document that had an error (recipient machines must share this feature for it to work)

Auto reduction

When receiving a single page document longer than A4 (297mm) the fax machine will automatically reduce the message to fit onto a single A4 sheet

Fleet management tools

BRAdmin^{16,17}

LAN/WAN management software

Embedded web server

Web based print management software embedded onto the device

Status monitor¹⁶

Monitor the status of your machine from your computer

Driver Deployment Wizard^{16,17}

Easily create print drivers for hassle free deployment over your network

Software

Brother iPrint&Scan Desktop^{15,17}

Print from, scan to, preview copies and check the machine status from Windows or macOS

PaperPort SE 14^{16,17}

Document management and sharing program from KOFAX

Utilities

Provides setup guides, manual, FAQ, troubleshooting and contact to Brother customer service

Easy setup

Simple access to drivers and software for the installation of your Brother machine from support.brother.com

Connectivity

Wired network

Gigabit ethernet (10Base-T/100Base-TX/1000Base-T)

Wireless network

2.4GHz: IEEE 802.11 b/g/n (Infrastructure mode)
IEEE 802.11 g/n (Wi-Fi Direct)

5GHz: IEEE 802.11 a/n (Infrastructure mode)
IEEE 802.11 a/n (Wi-Fi Direct)

Wi-Fi direct®

Print wirelessly without having to go through a wireless access point (both automatic and manual methods supported)

Wireless setup support

Wi-Fi Protected Setup (WPS)

Wireless applications

Vertical pairing

Mobile

Print or scan from your mobile device with Brother Mobile Connect, Airprint, Mopria

Local interface

Hi-Speed USB 2.0,
USB 2.0 host (front)

Security features

Wired network security

APOP, SMTP-AUTH, SSL/TLS (IPP, HTTP, SMTP, POP3, IMAP4, FTP), SNMP v3, 802.1x (EAP-MD5, EAP-FAST, PEAP, EAP-TLS, EAP-TTLS), Kerberos, IPsec

Wireless network security

WEP 64/128 bit, WPA-PSK (TKIP/AES), WPA2-PSK (TKIP/AES), WPA3-SAE (AES)
*Wi-Fi Direct supports WPA2-PSK (AES) only.

APOP, SMTP-AUTH, SSL/TLS (IPP, HTTP, FTP, SMTP, POP3, IMAP4), SNMP v3, 802.1x (EAP-FAST, PEAP, EAP-TLS, EAP-TTLS), Kerberos, IPsec

IPv4

ARP, RARP, BOOTP, DHCP, APIPA(Auto IP), WINS/NetBIOS name resolution, DNS Resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port9100, POP3, SMTP Client, IPP/IPPS, FTP Client and Server, CIFS Client, TELNET Server, SNMPv1/v2c/v3, HTTP/HTTPS server, TFTP client and server, ICMP, Web Services (Print/Scan), SNTP Client, LDAPS, IMAP4, Syslog

IPv6

NDP, RA, DNS resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port9100, IPP/IPPS, POP3, SMTP Client, FTP Client and Server, CIFS Client, TELNET Server, SNMPv1/v2c/v3, HTTP/HTTPS server, TFTP client and server, ICMPv6, SNTP Client, LDAPS, Web Services (Print/Scan), IMAP4, Syslog

IP filter

Restrict which network users can or cannot access the device over the network (IPv4 only)

Secure print

Protect print jobs with a four digit release code required at the device in order for them to be printed

E-mail notifications

Automatically have the device send e-mail alerts when it requires attention, such as when the toner is low or needs replacing

E-mail reports

Receive usage reports on a regular basis via e-mail

Automatic intrusion detection

All Brother Print devices are secure by design. Devices automatically recognise security attacks and take preventative measures, including rebooting where necessary, to ensure the device remains secure

Firmware updates

In addition to allowing automatic update alerts to install the latest version the printer can be set to not receive older firmware versions to avoid downgrade by an unauthorised user

Cloud secure print

Enables password protected driverless print job release

Setting lock

Secures access to the devices control panel by locking it

Certificate management

Use the default standard self-signed, create a custom self-signed certificate, certificate signing request (CSR), or external public certificate and private key for protected network communication

Secure function lock 3.0

Use a four digit pin or a password to identify and authenticate an individual or groups of users over a network. Allows access control for up to 100 users

Digitally-signed Firmware

The firmware for Brother print and scan devices is digitally signed and secure

Syslog

Allows IT Admin to access a single application (SIEM tool) to get device status updates for audit purposes over Syslog

On-premise active directory/LDAP authentication

Utilise existing infrastructure to restrict access to Brother devices using AD/LDAP. Staff can easily use their existing network login credentials to authenticate

Port-based network access control

(IEEE 802.1x)
Brother devices are in full compliance with this standard, to allow connection to an 802.1x EAP (Extensible Authentication Protocol) protected network

Restrict network protocols

The Protocol Control feature allows an administrator to restrict communication protocols (e.g. FTP, Telnet) as required

Store print log

Allows audit of a print log file saved to CIFS server. Record ID, type, name, user, date, time, page count for every print job

Supplies and consumables

In-box toner⁸

1,000 pages (BK)
1,000 pages (CMY)

Standard yield toner⁸

TN248
1,000 pages (BK)
1,000 pages (CMY)

High yield toner⁸

TN248XL
3,000 pages (BK)
2,300 pages (CMY)

Drum unit

DR248CL
Approx: 20,000 pages
at 1 page per job

Belt unit

BU229CL
Approx: 50,000 pages
at 2 pages per job

Waste toner box

WT229CL
Approx: 50,000 pages
at 5 pages per job

Address book

LDAP

The ability to connect to an external LDAP enabled address book, like Microsoft Exchange. Compatible with LDAP and LDAPS

Speed dials

300 locations for e-mail addresses and fax numbers

Group dial

A combination of up to 20 groups can be stored for broadcasting

Dimensions and weights

With carton (WxDxH)

497 x 536 x 533mm - 23.50kg

Without carton (WxDxH)

410 x 444 x 401mm - 20.20kg

Duty cycle

Recommended monthly

Up to 3,000 pages

Operating requirement

Power requirement

220-240V
AC 50/60Hz

Operating environment

Humidity 20 - 80 %
10°C - 32.5°C
50°F - 90.5°F

Storage environment

Humidity 35 - 85 %
0°C - 40°C
32°F - 104°F

Environment

Approx power consumption^{13,23}

Copying: 560W
Copying in quiet mode: 310W
Printing: 560W
Printing in quiet mode: 310W
Ready: 70W
Sleep: 10W
Deep Sleep: 0.6W
Power Off: 0.04W

TEC value

0.41 kWh/Week

Sound power¹²

Printing: Mono 6.41B(A)
Colour 6.51B(A)
Ready: Inaudible
Quiet mode: Mono 5.79B(A)
Colour 5.86B(A)
Deep sleep: Inaudible

Sound pressure¹²

PC printing: Approx. 47.0DB(A)
Ready: Inaudible
Quiet mode: 43.0DB(A)

Toner save

This reduces the toner consumption to get more pages from your consumables

Blue Angel

Yes

GS Mark

Yes

- 3 Scan Speeds based on ISO/IEC 17991
- 8 Approx. declared yield value in accordance with ISO/IEC 19798
- 11 Capacity calculated with 80gsm paper
- 12 Sound pressure and sound power level in accordance with ISO 7779
- 13 Power consumption power off is measured according to IEC 62301 Edition 2.0
- 15 Windows and macOS only
- 16 Windows only
- 17 Optional download
- 18 Requires an Internet connection
- 23 Power consumption is measured using ENERGY STAR Ver 3.1 test method network configuration



Compatible with Brother's
EcoPro toner subscription

brother
at your side

Working with you for a better environment

At Brother, our green initiative is simple. We strive to take responsibility, act respectfully and try to make a positive difference to help build a society where sustainable development can be achieved. We call this approach Brother Earth.

www.brotherearth.com

All specifications correct at the time of printing and are subject to change. Brother is a registered trademark of Brother Industries Ltd. Brand product names are registered trademarks or trademarks of their respective companies.

brother
at your side